

**NASSAU COUNTY
DEPARTMENT OF PUBLIC WORKS**






Nassau County Pavement Marking Notes:

For Nassau County Roads and Any Intersections Controlled by Nassau County Traffic Signal Equipment.

1. PAVEMENT MARKING ABBREVIATIONS SHOWN ON THIS DRAWING ARE AS FOLLOWS:

- BWLL - BROKEN WHITE LANE LINE, 6" Wide Line, White
(10' Long Line – 30' Space)
- DWLL - DOTTED WHITE LANE LINE, 6" Wide Line, White
(2' Long Line – 4' Space, 3' Long Line – 9' Space for Lane Drops)
- DYLL - DOTTED YELLOW LANE LINE, 6" Wide Line, Yellow
(2' Long Line – 4' Space)
- DDYLL - DOUBLE DOTTED YELLOW LANE LINE, 6" Wide Lines, Yellow
(2' Long Lines – 4' Spaces)
- FYBL - FULL YELLOW BARRIER LINE, 6" Wide Lines, Yellow Line
- HVCW - HIGH VISIBILITY CROSSWALK
(12" Wide Line, 10' Bars at 3.5' O.C., UNLESS OTHERWISE SHOWN)
- PYBL - PARTIAL YELLOW BARRIER LINE, 6" Width, Yellow Line
(10' Long Line – 30' Space – used for Center Left Turn Lane)
- SL - STOP LINE (12" Wide Min., 24" Wide at Signals)
- SWEL - SOLID WHITE EDGE LINE, 6" Wide Line, White
- SWCHL - SOLID WHITE CHANNELIZING HATCH LINE (See Note 10)
- SWHL - SOLID WHITE HATCH LINE 6" Wide Lines,
(At 5' O.C. at Hydrants and 10' O.C. in areas of Parking Restrictions)
- SWLL - SOLID WHITE LANE LINE, 6" Wide Line, White
- SYEL - SOLID YELLOW EDGE LINE, 6" Wide Line, Yellow Line
- SYHL - SOLID YELLOW HATCH LINE
(12" Wide Line at 10' O.C., UNLESS OTHERWISE SHOWN)
- YL - TRIANGLE PATTERN YIELD LINE, White

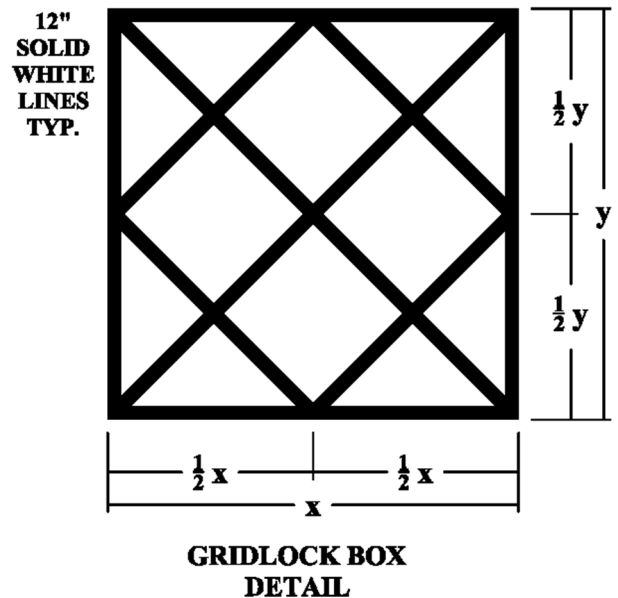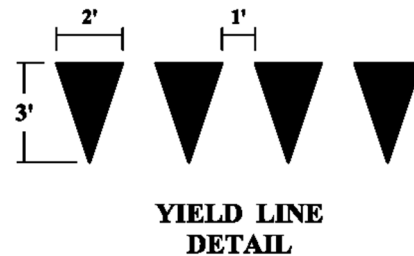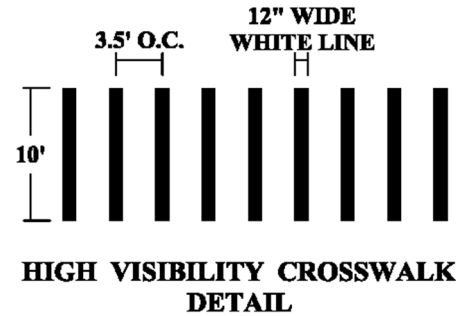

- 2. THE WIDTH AND LAYOUT FOR EACH OF THESE MARKINGS SHALL CONFORM TO THE CURRENT STANDARD DETAILS UNLESS OTHERWISE SHOWN ON THIS DRAWING.
- 3. ALL LONG LINES AND HATCHING TO BE EPOXY MATERIAL, ITEMS #442W & 442Y.
- 4. WORD MARKINGS AND CHARACTERS TO BE EPOXY MATERIAL, ITEM #442W-1.
- 5. ALL ARROWS TO BE EPOXY MATERIAL, ITEM #442W-1.
- 6. ALL STOP LINES AND CROSSWALKS TO BE EPOXY MATERIAL, ITEM #442W-1.
- 7. ALL GRIDLOCK LINES TO BE EPOXY MATERIAL, ITEM #442W-1.
- 8. ALL HATCH LINES TO BE PLACED AT A 45 DEGREE ANGLE TO THE ADJACENT TRAVEL LANE.
- 9. PAVEMENT MARKING SYMBOLS SHALL BE DESIGNED IN ACCORDANCE WITH THE NATIONAL MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) AND THE PROVISIONS OF THE NYS SUPPLEMENT TO THE MUTCD.
- 10. PAVEMENT MARKINGS FOR TRAFFIC ISLANDS SHALL BE 8" WIDE SOLID WHITE EDGE LINES AND 12" HATCH LINES AT 10' O.C., (CURRENT STANDARD DETAIL) UNLESS OTHERWISE SHOWN ON DESIGN DRAWING.